# Coil.

Convenient power. Coil is located below the worksurface to keep power close and tidy—one cord travels from the worksurface to the main power source.

48"L

### DIMENSIONS

Coil Cord Maximum Extension:

#### POWER

Infeed (UL Listed): Configuration:

#### **DESIGN DETAILS**

Mounting Style:

FINISHES (Refer to Pair Palette)

Power Block | Cord: Coil Bracket:

#### **PERFECT PAIR-ING**


(Refer to Product Brochures)


Tuck: Nest: Belay: Softwired, 15 AMPS (6) Power with Surge Protector


Worksurface Mounted | Nest Mounted | Tuck Mounted

Black | White Black

Cable Management Work Work




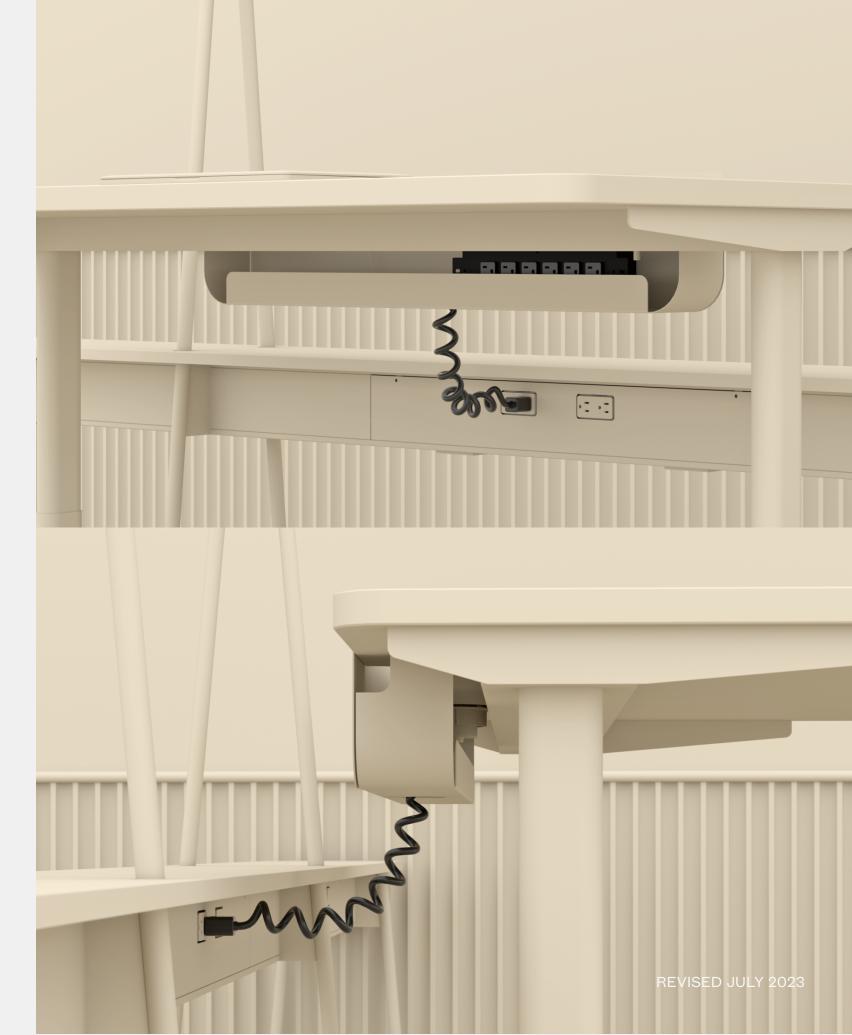

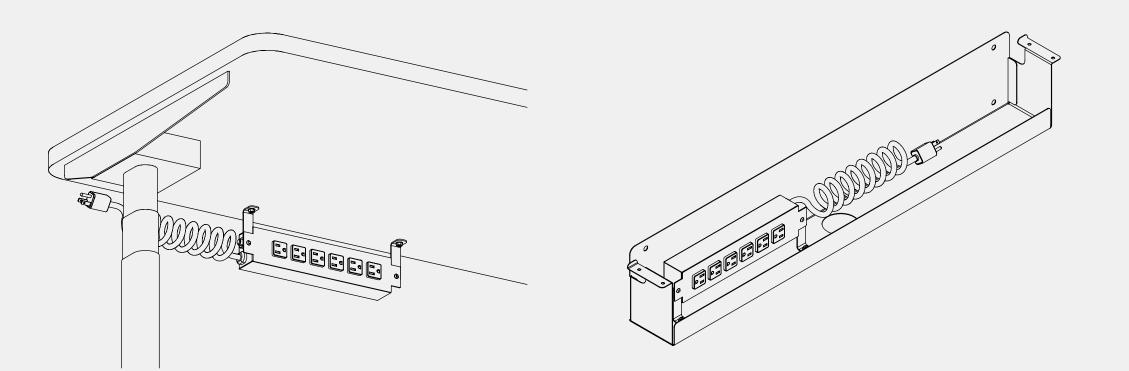

Worksurface Mounted

Nest Mounted

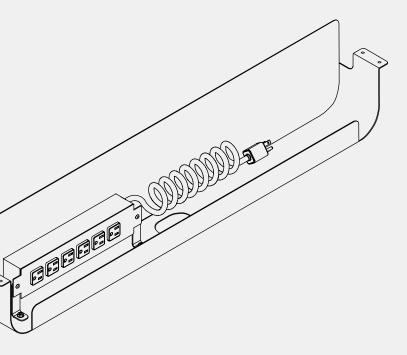


Tuck Mounted


#### VENEER

rustic white oak

METAL

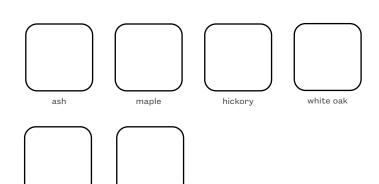

walnut

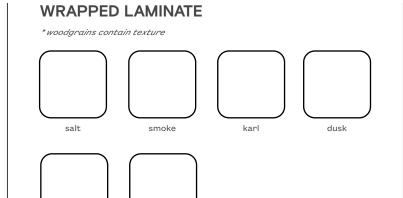


cocoa

nutmeg

partner

#### SOFT TOUCH LAMINATE

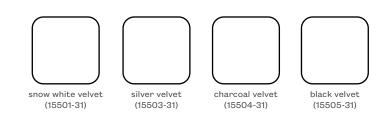

 olive gloss
 storm gloss
 ash gloss
 gumby gloss

 olive gloss
 storm gloss
 ash gloss
 gumby gloss


 wave gloss
 apollo gloss
 carbon gloss
 abyss gloss

 midnight gloss
 ghost gloss
 mist gloss
 sunny gloss

rouge gloss


salmon gloss

fire gloss

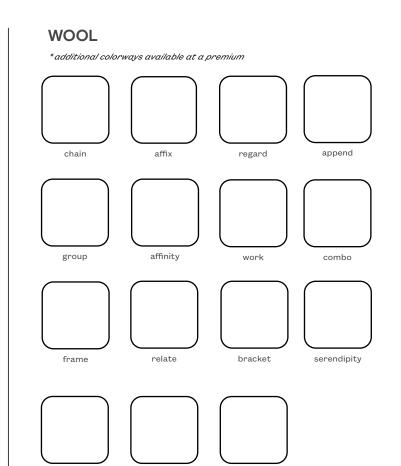


mix

compound

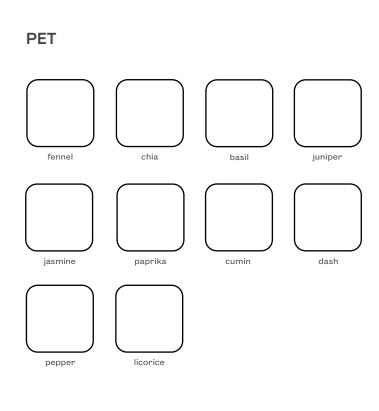

blush gloss

## LAMINATE

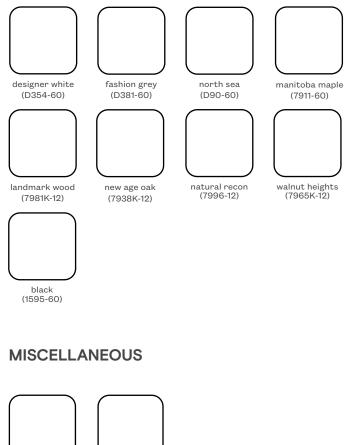

felt ink





whiteboard



soft touch plastic carbon



woodboard baltic birch



metal black oxide



exposed plywood baltic birch




metal brushed nickel




leather saddle




# SOFT TOUCH GLASS

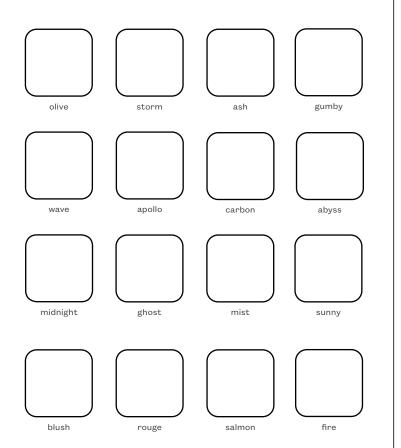










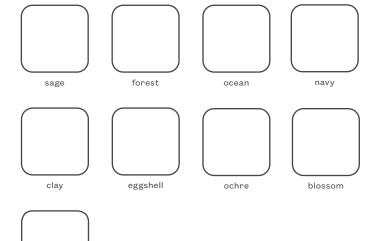

terracotta

**BIO PLASTIC** 





Email **hello@madebypair.com** for more information.